



Teknik Katalog



Technical Catalogue



Catalogue Technique



Catálogo Técnico

Kem-P[®] Vibration Motors



INDUSTRIAL




EVM/M


CE ISO 9001 : 2000

Monofaze / Monophase		3000 rpm - 50Hz - 3600 rpm - 60Hz													
Model Type Modelo	Gövde Size Grand. Tam.	Devir rpm Cycle Revol		Santrüfuj Kuvveti Centrifugal Force Force Centrifuge Fuerza Centrifuga (Kg) (KN)				Statik Moment Statical Moment Moment Statique Momento Estatico (Kgmm)		Ağırlık Weight Poids Peso (Kg)		Giriş Gücü Input Power Puissance Potencia (W)		Nominal Akım Nom. Current Courant Nominal Corriente Nominal (A)	
		50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz
EVM-M 50/3	01	3 0 0	3 6 0 0	48	52	0,471	0,510	4,8	3,6	4	3,8	100	110	0,46	0,92
EVM-M 65/3	01			66	76	0,647	0,746	6,57	5,26	4,55	4,45	150	150	0,68	1,35
EVM-M 130/3	01			125	135	1,266	1,324	12,4	9,3	4,75	4,6	160	160	0,73	1,46
EVM-M 200/3	01			187	180	1,843	1,766	18,6	12,4	5,1	4,75	160	160	0,73	1,46
EVM-M 300/3	02			310	297	3,041	2,914	30,8	20,5	8,5	8,1	250	300	1,15	2,80
EVM-M 400/3	02			418	401	4,101	3,934	41,5	27,6	11,4	10,9	350	450	1,70	3,50
EVM-M 650/3	03-a			668	687	6,553	6,739	66,4	47,4	21	20,4	440	500	2,10	4,50

Monofaze / Monophase		1500 rpm - 50Hz - 1800 rpm - 60Hz													
Model Type Modelo	Gövde Size Grand. Tam.	Devir rpm Cycle Revol		Santrüfuj Kuvveti Centrifugal Force Force Centrifuge Fuerza Centrifuga (Kg) (KN)				Statik Moment Statical Moment Moment Statique Momento Estatico (Kgmm)		Ağırlık Weight Poids Peso (Kg)		Giriş Gücü Input Power Puissance Potencia (W)		Nominal Akım Nom. Current Courant Nominal Corriente Nominal (A)	
		50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz
EVM-M 20/15	01	1 5 0 0	1 8 0 0	18	22	0,177	0,216	7,2	6	4,2	4	80	85	0,20	0,20
EVM-M 30/15	01			31	34	0,304	0,334	12,4	9,3	4,75	4,75	80	85	0,20	0,20
EVM-M 60/15	01			55	56	0,540	0,549	21,7	15,5	5,25	4,9	95	105	0,21	0,21
EVM-M 90/15	02			78	79	0,765	0,775	31	21,7	5,5	5,3	95	105	0,21	0,21
EVM-M 200/15	03-a			207	204	2,031	2,001	81,2	56,4	10,8	9,7	180	190	0,45	0,37

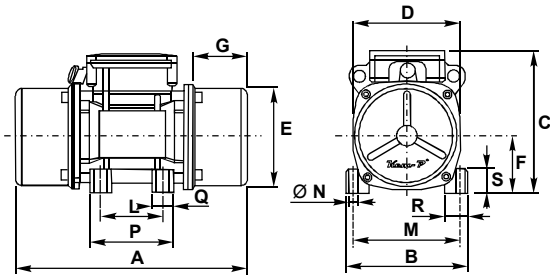

Rif 1

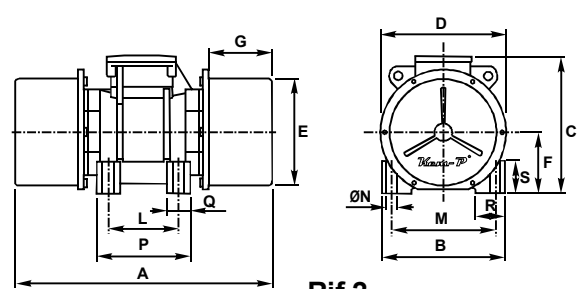

Rif 2

Gövde Ölçüleri - Overall Dimensions - Dimensions Totales - Dimensiones Totales (mm)		3000 rpm - 3600 rpm															
Model Type Modelo	Gövde Size Grand. Tam.	Rif	A	B	C	D	ØE	F	G	L	M	ØN	P	Q	R	S	
EVM-M 50/3	01	1	244	125	145	110	100	58	61	70÷74	106	4xM8	90	23	23	23	
EVM-M 65/3	01	1	244	125	145	110	100	58	61	70÷74	106	4xM8	90	23	23	23	
EVM-M 130/3	01	1	244	125	145	110	100	58	61	70÷74	106	4xM8	90	23	23	23	
EVM-M 200/3	01	1	244	125	145	110	100	58	61	70÷74	106	4xM8	90	23	23	23	
EVM-M 300/3	02	1	300	153	180	135	125	72	73	90	125	4xM12	118	27	27	30	
EVM-M 400/3	02	1	300	153	180	135	125	72	73	90	125	4xM12	118	27	27	30	
EVM-M 650/3	03-a	2	292	190	210	187	154	92	57	100÷105	140÷160	4xM12	133	33	40	47	

Gövde Ölçüleri - Overall Dimensions - Dimensions Totales - Dimensiones Totales (mm)		1500 rpm - 1800 rpm															
Model Type Modelo	Gövde Size Grand. Tam.	Rif	A	B	C	D	ØE	F	G	L	M	ØN	P	Q	R	S	
EVM-M 20/15	01	1	244	125	145	110	100	58	61	70÷74	106	4xM8	90	23	23	23	
EVM-M 30/15	01	1	244	125	145	110	100	58	61	70÷74	106	4xM8	90	23	23	23	
EVM-M 60/15	01	1	244	125	145	110	100	58	61	70÷74	106	4xM8	90	23	23	23	
EVM-M 90/15	02	1	300	153	180	135	125	72	73	90	125	4xM12	118	27	27	30	
EVM-M 200/15	03-a	2	292	190	210	187	154	92	57	100÷105	140÷160	4xM12	133	33	40	47	

Not - Note

